

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :**H04Q 7/32****A1**

(11) International Publication Number:

WO 96/14719

(43) International Publication Date:

17 May 1996 (17.05.96)

(21) International Application Number: **PCT/EP95/04301**(22) International Filing Date: **2 November 1995 (02.11.95)**


(30) Priority Data:

9422449.0

7 November 1994 (07.11.94)

GB(71) Applicant (for all designated States except US): **MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).**

(72) Inventors; and

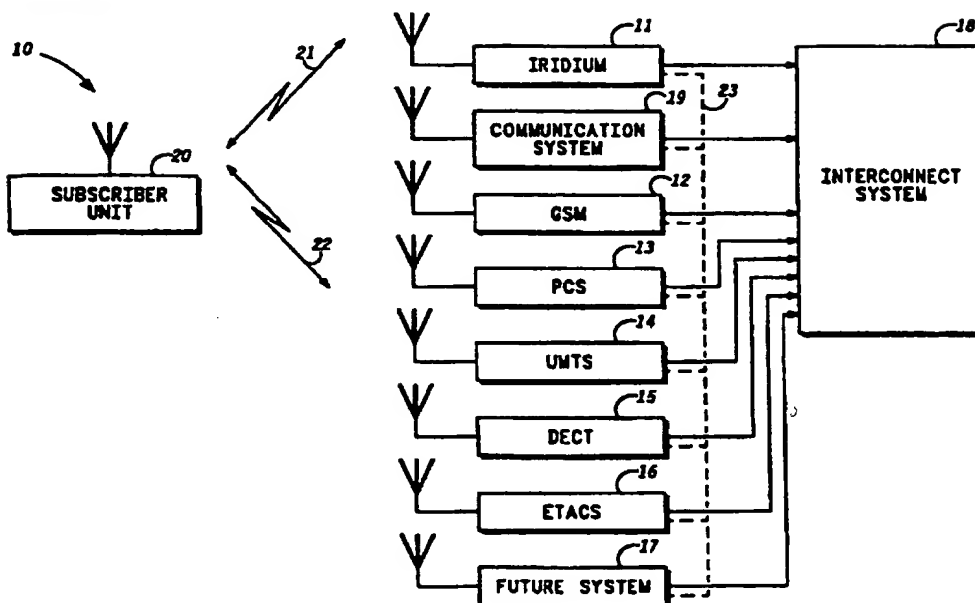(75) Inventors/Applicants (for US only): **VAN DEN HEUVEL, Anthony, P. [GB/GB]; Gunners Wood, Chertsey Road, Windlesham, Surrey GU20 6HZ (GB). WHINNETT, Nicholas, William [GB/GB]; 211A St. John's Hill, London SW11 1TH (GB). ROBINSON, William [GB/GB]; 15 Wentworth Close, Weybourne, Farnham, Surrey GU9 9HH (GB). GIBBS, Jon [GB/GB]; 56 Malvern Gardens, Hedsge End, Southampton, Hampshire SO3 4UL (GB).**(74) Agents: **MORGAN, Marc et al.; Motorola, European Intellectual Property Operations, Midpoint, Alencon Link, Basingstoke, Hampshire RG21 7PL (GB).**(81) Designated States: **AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).****Published***With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.***BEST AVAILABLE COPY**(54) Title: **COMMUNICATIONS OPERATING SYSTEM AND METHOD THEREFOR**

(57) Abstract

A common communications system provides information regarding the availability of other communication systems within the common communications system coverage area to a generic, programmable subscriber unit. The subscriber unit then selects one of the communications systems and receives enabling programming from the communication system. The enabling programming permits the subscriber unit to configure itself to operate on the selected communication system.

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AT	Austria	GB	United Kingdom
AU	Australia	GE	Georgia
BB	Barbados	GN	Guinea
BE	Belgium	GR	Greece
BF	Burkina Faso	HU	Hungary
BG	Bulgaria	IE	Ireland
BJ	Benin	IT	Italy
BR	Brazil	JP	Japan
BY	Belarus	KE	Kenya
CA	Canada	KG	Kyrgyzstan
CF	Central African Republic	KP	Democratic People's Republic of Korea
CG	Congo	KR	Republic of Korea
CH	Switzerland	KZ	Kazakhstan
CI	Côte d'Ivoire	LI	Liechtenstein
CM	Cameroon	LK	Sri Lanka
CN	China	LU	Luxembourg
CS	Czechoslovakia	LV	Latvia
CZ	Czech Republic	MC	Monaco
DE	Germany	MD	Republic of Moldova
DK	Denmark	MG	Madagascar
ES	Spain	ML	Mali
FI	Finland	MN	Mongolia
FR	France		
GA	Gabon		
		MR	Mauritania
		MW	Malawi
		NE	Niger
		NL	Netherlands
		NO	Norway
		NZ	New Zealand
		PL	Poland
		PT	Portugal
		RO	Romania
		RU	Russian Federation
		SD	Sudan
		SE	Sweden
		SI	Slovenia
		SK	Slovakia
		SN	Senegal
		TD	Chad
		TG	Togo
		TJ	Tajikistan
		TT	Trinidad and Tobago
		UA	Ukraine
		US	United States of America
		UZ	Uzbekistan
		VN	Viet Nam

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AT	Austria	GB	United Kingdom
AU	Australia	GE	Georgia
BB	Barbados	GN	Guinea
BE	Belgium	GR	Greece
BF	Burkina Faso	HU	Hungary
BG	Bulgaria	IE	Ireland
BJ	Benin	IT	Italy
BR	Brazil	JP	Japan
BY	Belarus	KE	Kenya
CA	Canada	KG	Kyrgyzstan
CF	Central African Republic	KP	Democratic People's Republic of Korea
CG	Congo	KR	Republic of Korea
CH	Switzerland	KZ	Kazakhstan
CI	Côte d'Ivoire	LI	Liechtenstein
CM	Cameroon	LK	Sri Lanka
CN	China	LU	Luxembourg
CS	Czechoslovakia	LV	Latvia
CZ	Czech Republic	MC	Monaco
DE	Germany	MD	Republic of Moldova
DK	Denmark	MG	Madagascar
ES	Spain	ML	Mali
FI	Finland	MN	Mongolia
FR	France		
GA	Gabon		
		MR	Mauritania
		MW	Malawi
		NE	Niger
		NL	Netherlands
		NO	Norway
		NZ	New Zealand
		PL	Poland
		PT	Portugal
		RO	Romania
		RU	Russian Federation
		SD	Sudan
		SE	Sweden
		SI	Slovenia
		SK	Slovakia
		SN	Senegal
		TD	Chad
		TG	Togo
		TJ	Tajikistan
		TT	Trinidad and Tobago
		UA	Ukraine
		US	United States of America
		UZ	Uzbekistan
		VN	Viet Nam

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AT	Austria	GB	United Kingdom
AU	Australia	GE	Georgia
BB	Barbados	GN	Guinea
BE	Belgium	GR	Greece
BF	Burkina Faso	HU	Hungary
BG	Bulgaria	IE	Ireland
BJ	Benin	IT	Italy
BR	Brazil	JP	Japan
BY	Belarus	KE	Kenya
CA	Canada	KG	Kyrgyzstan
CF	Central African Republic	KP	Democratic People's Republic of Korea
CG	Congo	KR	Republic of Korea
CH	Switzerland	KZ	Kazakhstan
CI	Côte d'Ivoire	LI	Liechtenstein
CM	Cameroon	LK	Sri Lanka
CN	China	LU	Luxembourg
CS	Czechoslovakia	LV	Latvia
CZ	Czech Republic	MC	Monaco
DE	Germany	MD	Republic of Moldova
DK	Denmark	MG	Madagascar
ES	Spain	ML	Mali
FI	Finland	MN	Mongolia
FR	France		
GA	Gabon	MR	Mauritania
		MW	Malawi
		NE	Niger
		NL	Netherlands
		NO	Norway
		NZ	New Zealand
		PL	Poland
		PT	Portugal
		RO	Romania
		RU	Russian Federation
		SD	Sudan
		SE	Sweden
		SI	Slovenia
		SK	Slovakia
		SN	Senegal
		TD	Chad
		TG	Togo
		TJ	Tajikistan
		TT	Trinidad and Tobago
		UA	Ukraine
		US	United States of America
		UZ	Uzbekistan
		VN	Viet Nam

COMMUNICATIONS OPERATING SYSTEM AND METHOD THEREFOR

Field of the Invention

5 The present invention relates, in general, to communication systems and, more particularly, to a communications operating system and method therefor.

Background of the Invention

10

 Within the past several years, radio frequency (RF) communication systems have gone from a very limited number of systems, each available for one type of function, to a vast number of potential systems available for providing the same type of basic service. For example, cellular
15 communication systems began in Europe with the Nordic Mobile Telephone (NMT) system. At the time, this was the only system which provided mobile dial-up telephone operations. Since its introduction, newer analog systems have been introduced, such as Total Access Communication System (TACS), and, more recently digital systems such
20 as the Groupe Spécial Mobile (GSM) (now commonly referred to as the Global System for Mobile communications), DCS-1800 (Digital Cellular System), CT-2 (Cordless Telephone), and DECT (Digital European Cordless Telephone) systems. Further, there are considerable numbers of systems each serving a specific customer service demand such as the European
25 Radio Messaging System (ERMS) for paging and Ministry of Posts and Telecommunications standard MPT 1327 (A Signalling Standard to Trunked Private Land Mobile Radio Systems) for private mobile radio applications. These systems often overlap in their coverage areas. Thereby giving users an option as to which system to select.

30

 There is also a proliferation of new systems being developed, such as the American Digital Cellular (ADC), referred to as Interim Standard 54 (IS-54), and a Personal Digital Cellular (PDC) standard being developed in Japan, referred to as the RCR (Research & Development Center for Radio Systems) standard 27. There is also a Code Division Multiple Access (IS-
35 95) system being developed as a higher capacity/higher quality alternative to the existing systems. In addition to what is normally considered cellular, there are a number of Personal Communication Systems (PCS) and wireless local loop systems being developed that are all competing for

customers. Some of these systems will be based on existing protocols (such as the DCS-1900 (Digital Cellular System) being based upon GSM).

Also, some previous land mobile trunking systems offer dial-up telephony services. One future system currently under design is the
5 Future Land Mobile Public Telephone System (FLMPTS).

However, one problem for the end user is that to be able to go anywhere in the world and use a subscriber unit, the user would need to carry a dozen or more subscriber units since one unit will not operate on all of the systems. By way of example, even though GSM and ADC operate
10 on similar Time Division Multiple Access (TDMA) technologies, there is presently no way to take your GSM phone to America and have it operate on a ADC system.

In addition, even within the same system, the mobile owned by a user may have limitations built in during its original programming that
15 prevent it from using features subsequently developed for a particular system. While there are some subscriber units available today that can be returned and reprogrammed (either electronically or by replacing some of the memory devices containing the programming), the user often finds themselves with a subscriber unit that has become obsolete in just a short
20 time.

A related invention is found in "Bulletin Board Resource for Communication System Access" (US-A-5,301,359) invented by VandenHuevel et al. and assigned to Motorola Inc. This invention describes a method of providing information regarding communication
25 system capabilities for multiple, independent RF communication systems. The method comprises the steps of monitoring an RF bulletin board that is independent of the multiple, independent RF communication systems; and receiving information from the RF bulletin board regarding the multiple RF communication systems.

Another type of system is described in EP-A2-0 365 200, Majbudar et al. This application describes a telecommunication system in which a subscriber (which includes a touch screen display and a customer premises computer) can, by use of the computer, transmit a request to a central office to provide an appropriate software package to activate a
30 feature of the phone. This application is similar, and in fact uses, a standard ISDN process to transfer a program from one computer to another. The result then is that while certain features in the phone may be
35

activated, it does not address the issue of providing access to multiple communication systems operating using different protocols.

Brief Description of the Drawings

5

FIG. 1 is a block diagram of a network utilizing the present invention;

FIG. 2 is a flow chart illustrating a process embodying the present invention;

10 FIG. 3 is a flow chart illustrating a subprocess of the process illustrated in FIG. 2;

FIG. 4 is a more detailed block diagram of the common communication system of FIG. 1;

15 FIG. 5 is a more detailed block diagram of the subscriber unit of FIG. 1;

FIG. 6 is a frequency band chart; and

FIGS. 7 and 8 illustrate designs of a subscriber unit which may potentially utilize the present invention.

20

Detailed Description of the Drawings

Referring initially to FIG. 1, a block diagram of a network, generally designated 10, utilizing the present invention is illustrated. In network 10, there are a plurality of communication systems 11-17 all coupled through a wireline system 18 to a common communication system 19. Interconnect system 18 would potentially be a wireline system, such as an Integrated Services Digital Network (ISDN). The systems may also be directly connected along line 23. In FIG. 1, a subscriber unit 20 is seeking access to one of the communication systems in network 10. To accomplish this access, subscriber unit 20 will first access common communication system 19 using a channel 21. Common communication system 19 will reply to subscriber unit 20 with a list of systems available for use in network 10. Along with the list of available systems, system 19 may also provide information on types of features available and on system costs.

35 Once subscriber unit 20 has determined which system it desires to utilize, it will make a request to common communication system 19 and receive an enabling program for the selected communication system.

Subscriber unit 20 will then open a channel 22 with the selected communication system, in this case Universal Mobile Telecommunication System (UMTS) 14.

5 The process of accessing the selected communication system is illustrated in more detail in FIG. 2, by a process, generally designated 30. Process 30 begins with step 31. This may be implemented when a user starts to make a call using a subscriber unit or when a user first enters an area covered by the common communication system. The subscriber unit then accesses the common communication system, step 32. This may be
10 performed passively, in that the subscriber unit may only monitor the information being transmitted by the common communication system. However, at some point, the subscriber unit will need to request and be assigned to a channel of the common communication system.

Once the subscriber has accessed the channel of the common
15 communication system, it receives an indication of available communication systems within the coverage area of this common communication system, step 33. This indication of available systems may be general, as in a "GSM" system is available; or provide more detail, such as a "half-rate GSM" system is available or one with a particular feature.

20 At this point, the common communication system may also provide a list of any requirements of a particular communication system, step 34. Such requirements may include display capabilities, power, frequency band, modulation scheme, etc. This would then be followed by a verification by the subscriber unit that it is, or can be made, compliant with
25 any of those requirements, step 35.

The subscriber units envisioned for this type of system will be capable of being programmed over the air and may also be provided with stable memory of some pre-programmed systems. Depending upon the system selected and the resident programming of the subscriber unit, the
30 subscriber unit then determines if any non-resident programming is required, step 36. If programming is required, the subscriber unit will request the programming from the common communication system, step 37. The common communication system will respond by transmitting the enabling program, which will be received by the subscriber unit,
35 subprocess 38.

Subprocess 38 will generally consists of one or more of the steps illustrated in FIG. 3. In order to be enabled to function on a selected

communication system, the subscriber unit may require certain programming. This programming may be provided either by way of enabling functions that are already resident in the subscriber unit, step 44; or by providing non-resident functions, step 45. A type of resident function
5 may be an indicator of what type of coding or encryption process is used by the selected system. The subscriber unit would have several of these present in memory and only need to be told which one to utilize. An example of a non-resident function would be any new type of capability that may be added to the system. For example, a new type of hand-off algorithm
10 may have been implemented since the subscriber unit's last memory update.

The non-resident function provided to the subscriber unit may be provided either by providing a specification that can be executed directly by the subscriber unit; or by providing a high level design specification. If a
15 high level design specification is provided, the subscriber unit will generate, or elaborate, its own executable specification. As part of this, non-resident functions, once received, may be stored in a non-volatile memory thereby becoming resident functions. Along with this, older resident functions may be removed from the subscriber unit.

Returning now to FIG. 2, process 30 continues with step 39 where the subscriber unit configures itself to operate on the selected communication system. When this occurs, the subscriber unit may disconnect from the common communication system, or it may remain in contact. This would probably, but not necessarily, require a dual mode type
20 of subscriber unit. This concept is known in the art and is currently available for subscriber units operating on both AMPS and ADC systems in the United States of America.

After the subscriber unit has been configured, step 39, it will then test its compatibility, step 40, by determining if it meets any requirements
30 of the selected communication system. If the test is satisfactory, the subscriber unit will then access the selected communication system, step 41. This may be accomplished through the receipt of a hand-off instruction from the common communication system or by a direct request from the subscriber unit.

35 Once the access has been completed, process 30 ends, step 42.

Referring now to FIG. 4, a more detailed block diagram of common communication system 19 is provided. System 19 would preferably consist

of RF equipment 52 as normally associated with any mobile communication system. The particular protocol of operation is not important for the present invention, but would, for example, be a derivative of one of the basic type of system. Alternatively, the protocol may be a completely new design to maximize its efficiency. In addition, system 19 would contain a list 48 of other communication systems available. This list may be a simple list of systems available or it may contain additional information on the individual systems. This additional information may be feature capabilities, system requirements, system cost, etc.

Common system 19 will also contain a feature list. This list would be in the form of a matrix having features cross referenced by subscriber unit capabilities. In addition, each feature would have either or both of an executable specification a high level design specification. This list would then be used to generate the programming information sent to the subscriber unit.

Common system 19 may also contain a system subscriber register 50 for all of the systems in the network. With this information, the system may determine if the subscriber unit is permitted access to the selected system before taking resources to provide the subscriber with the programming requested. It can also be used by the other systems, either by way of interconnect system 18 or directly by bus 23, to set-up billing information on the subscriber. An alternative method would be to locate this register with the individual systems.

In FIG. 5, a general block diagram of subscriber unit 20 is illustrated. Subscriber 20 has the typical duplex switch 53 for coupling antenna 52 to transmitter 55 and receiver 57. Transmitter 55 is coupled to duplex switch 53 through an amplifier 54. Transmitter 55 and receiver 57 each have multi-loop synthesizers 56 and 58, respectively. Synthesizers 56 and 58 permit subscriber 20 to operate at different frequency ranges. It should be noted here, that while subscriber 20 is meant to be a generic, programmable type of radiotelephone, it is not necessarily meant to work in every possible system. For example, in FIG. 6 a frequency band chart of many of today's existing and planned systems is presented. Subscriber 20 may be designed to operate over a series of these systems, such as Band I or Band II (or the lower or upper portions of Band II).

Returning now to FIG. 5, subscriber 20 further consists of a digital signal processor (DSP) 59, a controller 60, and a memory 61. When the

enabling program is received from the network, controller 60 will use this to coordinate the programming of DSP 59. As described above, some of the functions may be resident in subscriber unit 20. For resident functions, the executable code will be retrieved from a memory 61, which may, if
5 preferable, be physically located in DSP 59 or controller 60.

Finally, in FIGS. 7 and 8, a design of a subscriber unit 70 capable of utilizing the present invention is illustrated. Subscriber unit 70 is a combination personal data assistant (PDA) and radiotelephone. It consists of a display 71 and a keypad 72 which are each divided between two
10 portions, 73 and 74, of PDA 70. Portions 73 and 74 are joined by a hinge 80 which permits the two portions to be closed upon each other, as illustrated in FIG 8. On the outside of portion 74 is a speaker 76 and an microphone 77. Optional keys, or buttons, 78 are also provided on the outside portion to be used for certain general functions such as: call answer, call end, power
15 on/off, etc.

In operation, when PDA 70 accesses the common network, a list of available systems is displayed in display 71. The user can then select the system desired using the keypad. The process described above in FIG. 2 will then continue by providing enabling programming to PDA 70. PDA 70
20 may then be closed and used as radiotelephone.

Thus, it will be apparent to one skilled in the art that there has been provided in accordance with the invention, a communications operating system and method of operation that fully satisfies the objects, aims, and advantages set forth above.

25 While the invention has been described in conjunction with specific embodiments thereof, it is evident that many alterations, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, it is intended to embrace all such alterations, modifications, and variations in the appended claims.

Claims

1. A method of accessing a selected communication system with a subscriber unit, said method characterized by the steps of:
- 5 accessing a common communication system;
 receiving an indication of any communication systems available in a geographic region associated with said common communication system;
 requesting access to said selected communication system of said communication systems;
- 10 receiving an enabling program for said selected communication system.
2. The method of claim 1 further characterized by the steps of:
- 15 configuring said mobile to operate in accordance with a protocol of said selected communication system; and
 accessing said selected communication system using said protocol.
3. The method of claim 2 further characterized by said configuring being derived in accordance with said enabling program.
- 20
4. The method of claim 2 further characterized by the step of testing the compliance of said mobile with the requirements of said selected communication system prior to the step of accessing said selected communication system.
- 25
5. The method of claim 1, prior to the step of receiving said enabling program, further characterized by the steps of:
- determining if programming of said mobile to operate on said selected communication system is required; and
- 30 requesting said programming from said common communication system.
6. The method of claim 1 wherein said step of receiving said enabling program consists of at least one of the following steps:
- 35 enabling an existing resident function within said mobile; and
 downloading a non-resident functional instruction to said mobile.

7. The method of claim 6 wherein said non-resident program comprises at least one of:

- a high level design specification; and
- 5 a specification which can be executed directly as a function by said mobile.

8. The method of claim 7 wherein said high level design specification is automatically elaborated by said mobile resulting in a function of said mobile.

10

9. The method of claim 1 wherein said selected communication system is selected upon the basis of features identified by said indication provided by said selected communication system.

15 10. The method of claim 1 further characterized by the step of verifying whether a user is permitted access to said selected system following said step of requesting said selected communication system.

11. The method of claim 1 wherein said indication received comprises at least one of the following:

- a cost related to said communication systems; and
- 20 a feature of said communication systems.

12. The method of claim 1 further characterized by the steps of

25 receiving a system requirement from said common communication system; and

verifying that said mobile is capable of complying with said system requirement.

13. A communications operating system having a common communication system comprising:

- radio frequency transceiving means for transmitting and receiving radio frequency signals;
- system list means for storing a list of communication systems
- 35 available; and
- feature list means for storing a list of feature programs.

14. The communication operating system of claim 13 wherein said system list means contains at least one of:

- 5 a communication system feature;
 a communication system requirement; and
 a communication system cost.

15. The communication operating system of claim 13 wherein said feature programs comprises at least one of:

- 10 an enabling program to enable resident functions;
 a high level design specification; and
 an executable feature specification.

1/7

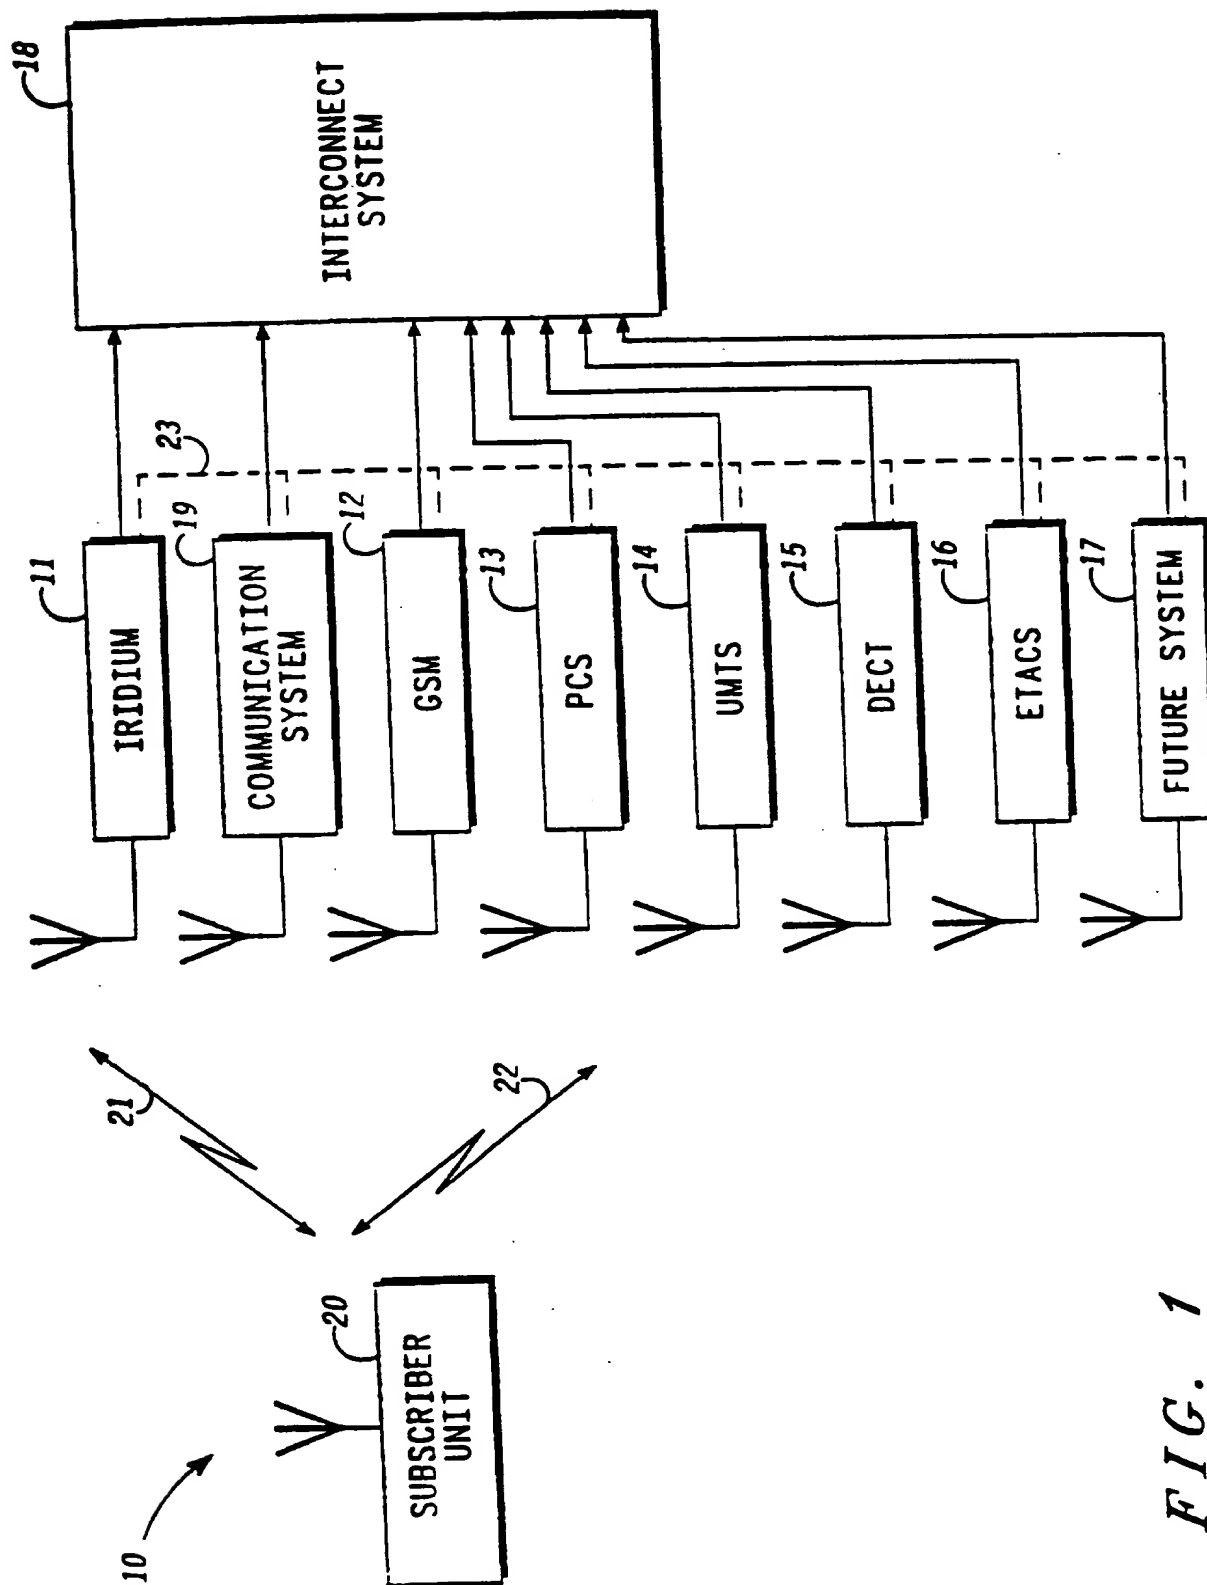


FIG. 1

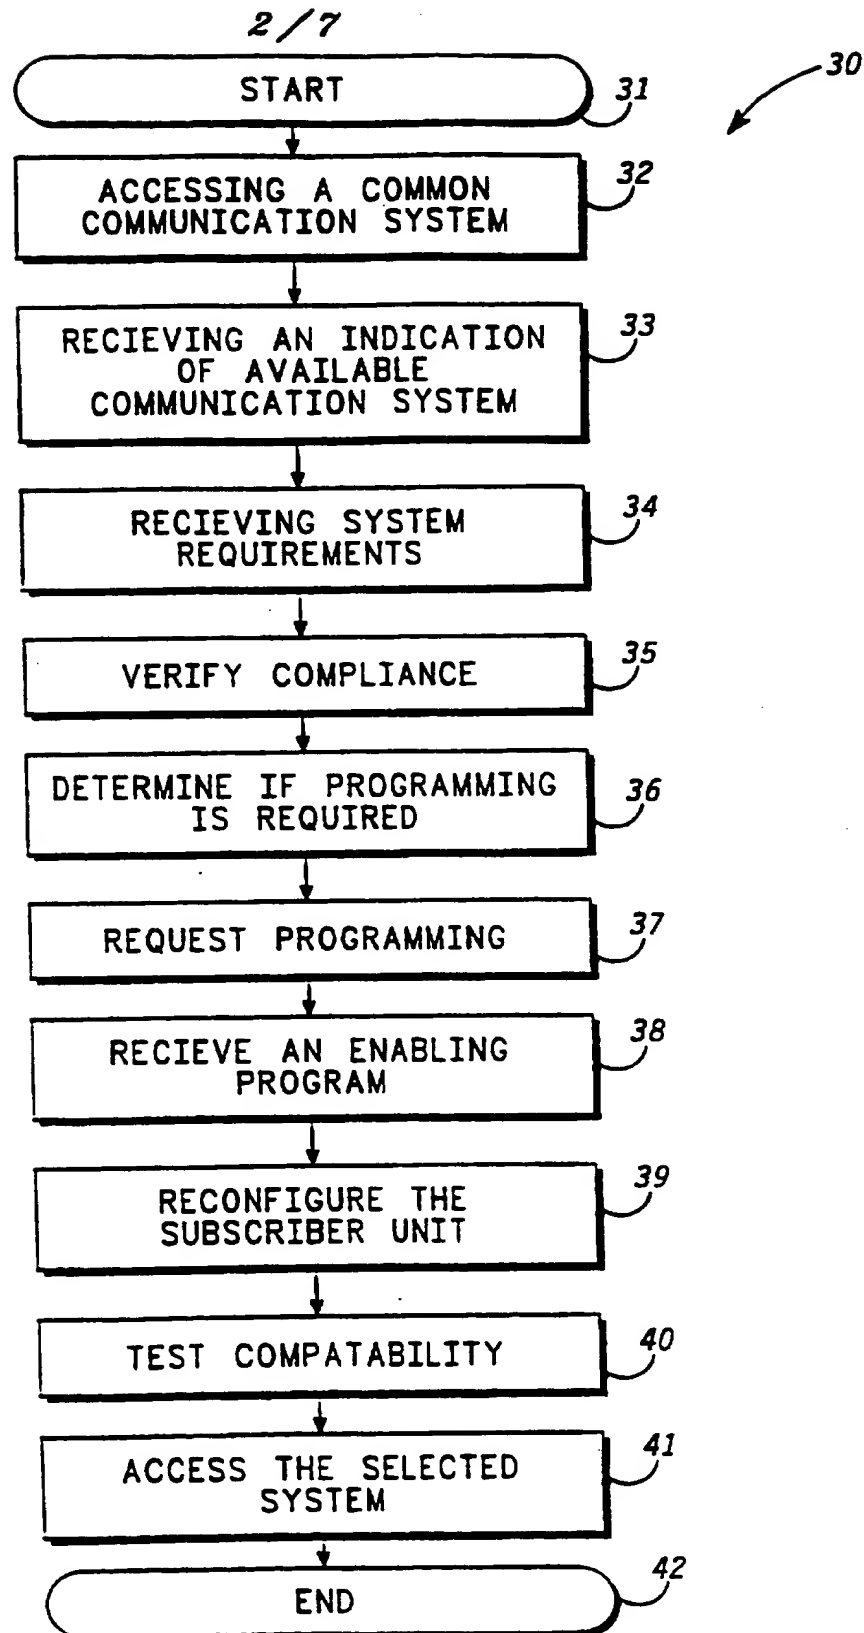
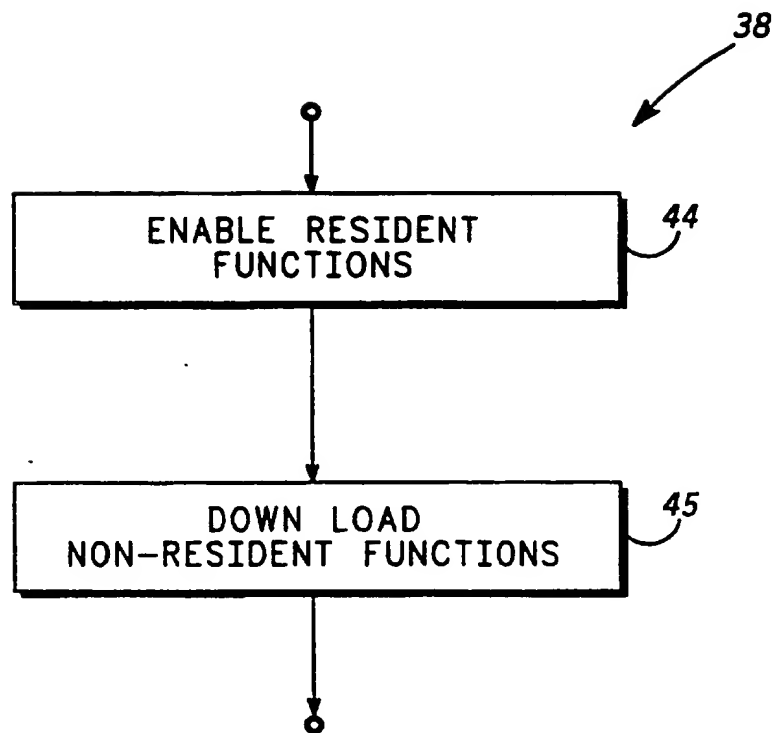


FIG. 2

3 / 7

*FIG. 3*

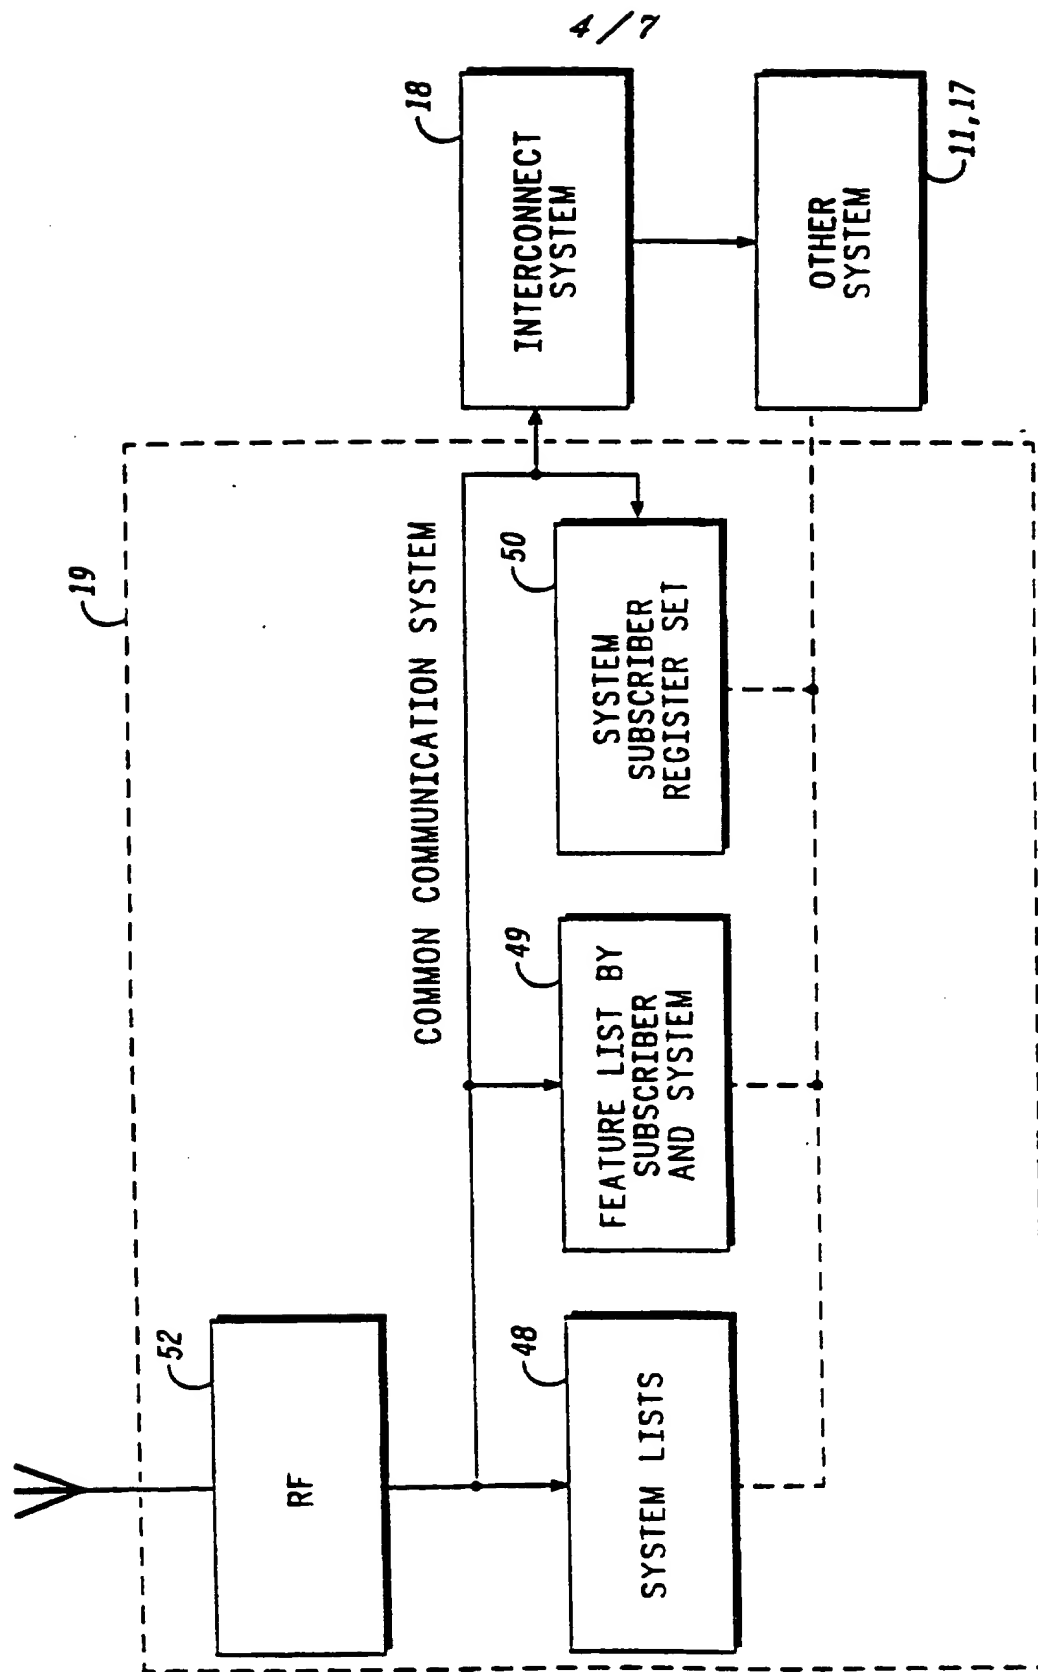


FIG. 4

5/7

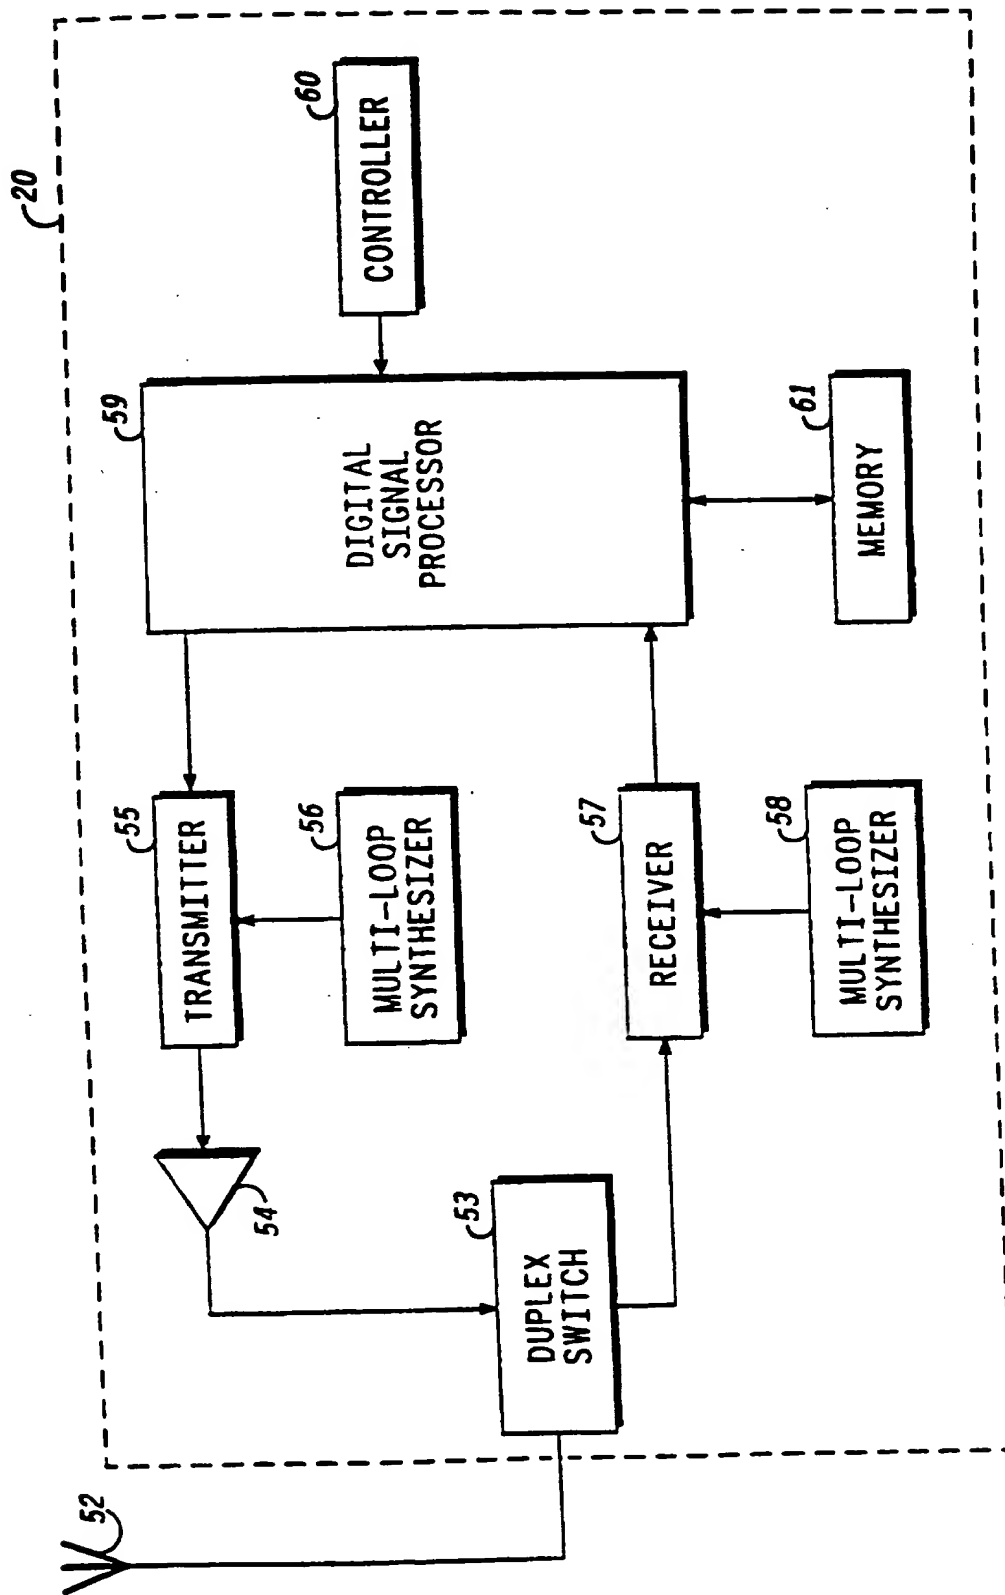


FIG. 5

6/7

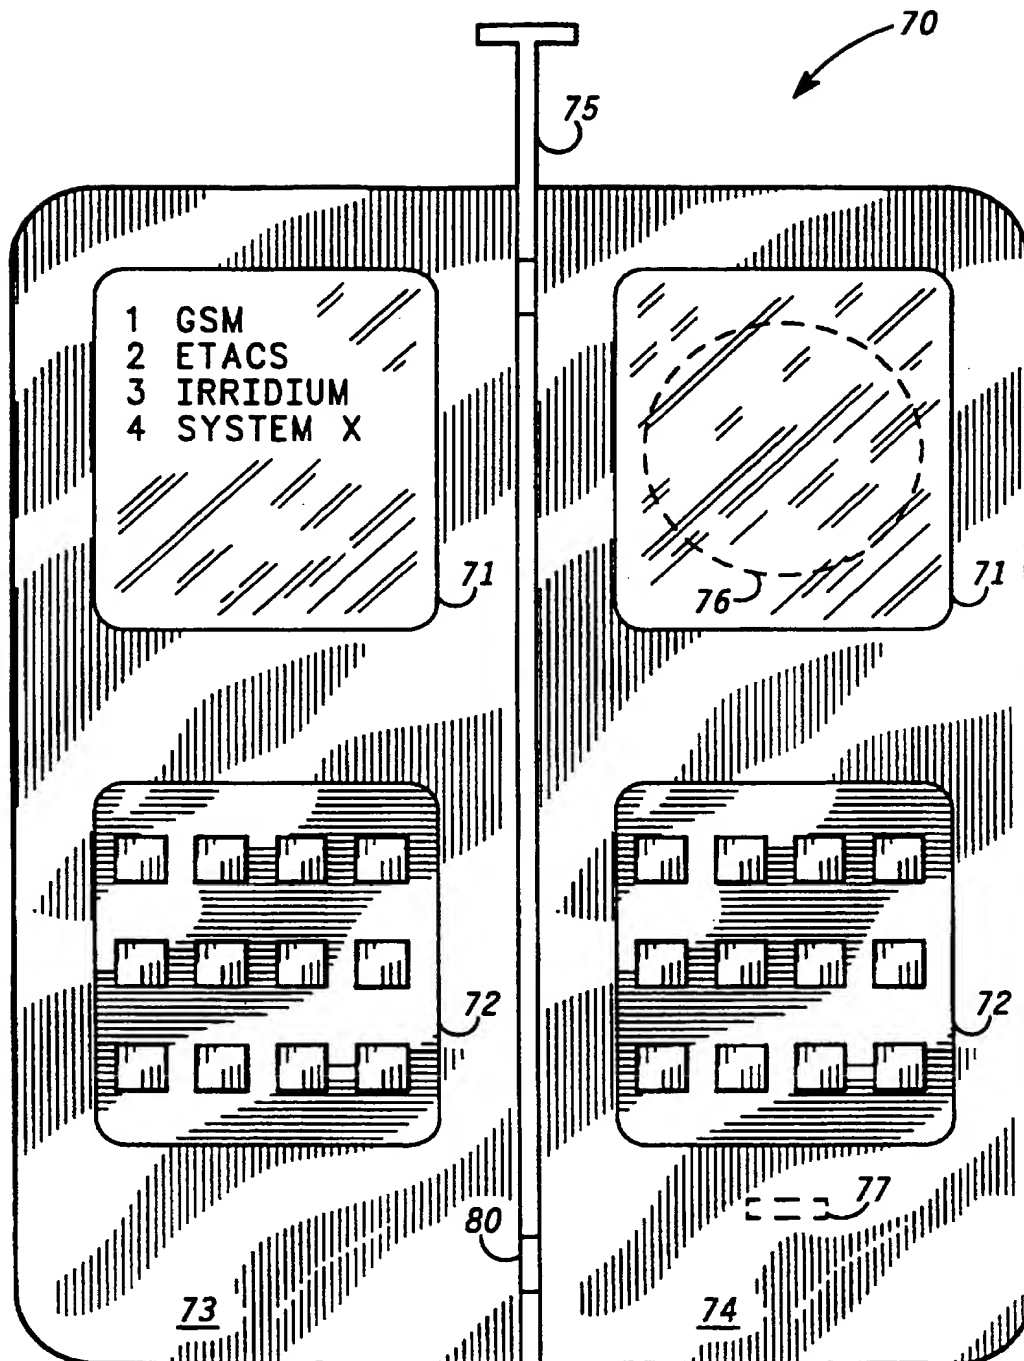


FIG. 6

7/7

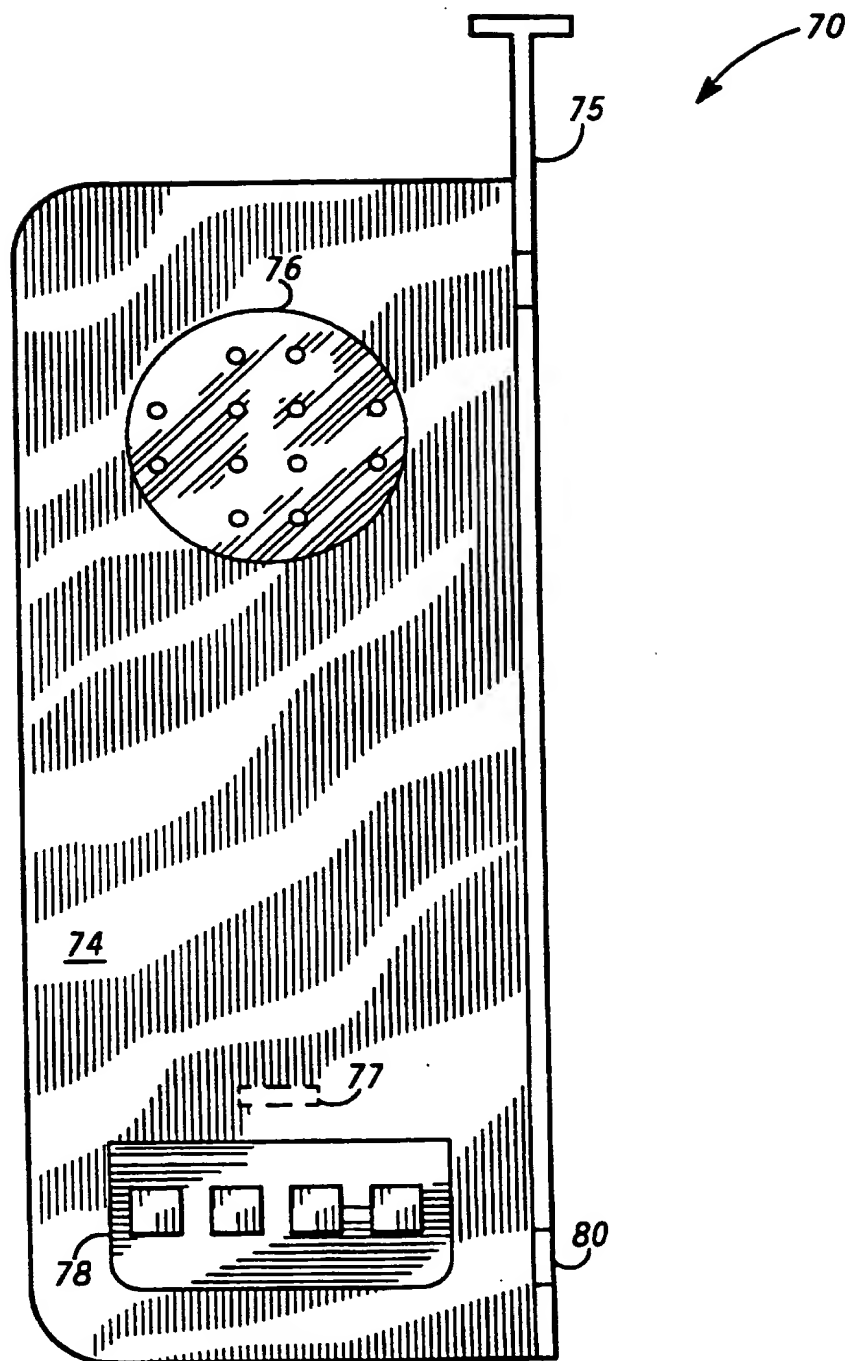


FIG. 7

INTERNATIONAL SEARCH REPORT

 Internat Application No
 PC7/EP 95/04301

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 H04Q7/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)
 IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,92 14308 (MOTOROLA INC) 20 August 1992	13,14
Y	see page 2, line 24 - page 3, line 12 see page 3, line 28 - page 4, line 23 see page 5, line 26 - line 30 see page 6, line 3 - line 30 see page 9, line 23 - page 10, line 1 see page 10, line 20 - page 12, line 2 ---	1,9,10, 12,15
Y	EP,A,0 459 344 (CIT ALCATEL) 4 December 1991	1,9,10, 12,15
A	see column 3, line 31 - line 53 see column 4, line 14 - line 39 see column 4, line 49 - column 5, line 18 --- -/--	2-7

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier document but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 "&" document member of the same patent family

Date of the actual completion of the international search

4 April 1996

Date of mailing of the international search report

12.04.96

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Gerling, J.C.J.

INTERNATIONAL SEARCH REPORT

Internal Application No

PC1/EP 95/04301

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>ELECTRONICS AND COMMUNICATION ENGINEERING JOURNAL, vol. 5, no. 3, 1 June 1993 pages 147-156, XP 000377790 STEELE R ET AL 'THIRD GENERATION PCN AND THE INTELLIGENT MULTIMODE MOBILE PORTABLE' see page 155, left column, paragraph 13 - page 156, left column, line 8 -----</p>	1, 13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 95/04301

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO-A-9214308	20-08-92	AU-B-	655968	19-01-95
		AU-B-	1248092	07-09-92
		CA-A-	2078995	01-08-92
		EP-A-	0523220	20-01-93

EP-A-0459344	04-12-91	FR-A-	2662891	06-12-91
		AU-B-	643526	18-11-93
		AU-B-	7739591	05-12-91

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)